
# **GEFRAN**

## OIL FILLED MELT PRESSURE TRANSMITTERS

# **WE SERIES**

Output 4...20mA

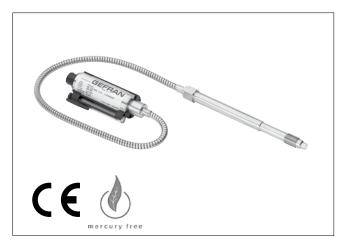

MAIN FEATURES

- Pressure ranges from:
   0-35 to 0-1000 bar / 0-500 to 0-15000 psi
- Accuracy: < ±0.25% FSO (H); < ±0.5% FSO (M)</li>
- · Fluid-filled system for temperature stability
- Oil filling meets FDA requirements CFR 178.3620 and CFR 172.878
- Oil filling volume: WE0 (30mm³); WE1, WE2, WE3 (40mm³)
- 1/2-20UNF, M18x1.5 standard threads; other types available on request
- · Other diaphragms available on request
- · Autozero function on board / external option
- Drift Autocompensation function (SP version)
- 17-7 PH corrugated diaphragm with GTP coating for ranges below 100 bar-1500 psi

GTP (advanced protection) Coating with high resistance against corrosion, abrasion and high temperature

### **AUTOZERO FUNCTION**

All signal variations in the absence of pressure can be eliminated by using the Autozero function.

This function is activated by closing a magnetic contact located on the transmitter housing.

The procedure is permitted only with pressure at zero.

# AUTOCOMPENSATES INFLUENCE OF MELT TEMPERATURE

Thanks to internal self-compensation, the WSP series transmitter cancels the effect of pressure signal variation caused by variation of Melt temperature.

This reduces at the minimum the read error caused by heating of the filling fluid (typical of all sensors built with "filled" technology).

The WE series of Gefran, are pressure transmitters for using in High temperature environment.

The main characteristic of this series is the capability to read temperature of the media up to 315°C.

The constructive principle is based on the hydraulic trasmission of the pressure.

The fluid-filled system assures the temperature stability. The phisical measure is transformed in a electrical measure by means the strain-gauge technology.


#### **TECHNICAL SPECIFICATIONS**

Accuracy (1)	<b>H</b> <±0.25%FSO (1001000 bar) <b>M</b> <±0.5%FSO (351000 bar)	
Resolution	Infinite	
Measurement range	035 to 01000bar 0500 to 015000psi	
Maximum overpressure (without degrading performances)	2 x FS 1.5 x FS above 500bar/7500psi	
Measurement principle	Extensimetric	
Power supply	1030Vdc	
Maximum current absorption	32mA	
Insulation resistance (at 50Vdc)	>1000 MOhm	
Output signal Full Scale (FSO)	20mA	
Zero balance (tollerance ± 0.25% FSO)	4mA	
Zero signals adjustment (tollerance ± 0.25% FSO)	"Autozero" function	
Span adjustment within ± 5% FSO	See Manual	
Maximum allowed load	See diagram	
Response time (1090% FSO)	~ 1ms	
Output noise (RMS 10-400Hz)	< 0.025% FSO	
Calibration signal	80% FSO	
Output short circuit ingress and reverse polarity protection	YES	
Compensed temperature range	0+85°C	
Operating temperature range	-30+105°C	
Storage temperature range	-40+125°C	
Thermal drift in compesated range: Zero / Calibration / Sensibility	< 0.02% FSO/°C	
Diaphragm maximum temperature	315°C / 600°F	
Zero drift due to change in process temperature (zero)	< 0.04 bar/°C	
Zero drift temperature for Autocompensated version (SP) within the temperature range 20°C-315°C inclusive the drift temperature of the housing	< 0.005 bar/°C 100 ≤ p < 500 bar 0.0022 %FS/°C p ≥ 500 bar	
Standard Material in contact with process medium	Diaphragm: • 17-7PH corrugated diaphragm with GTP Stem • 17-4 PH	
Thermocouple (model WE2)	STD: type "J" (isolated junction)	
Protection degree (with 6-pole female connector)	IP65	

FSO = Full scale output

(1) BFSL method (Best Fit Straight Line): includes combined effects of Non-Linearity, Hysteresis and Repeatability.

### **MECHANICAL DIMENSIONS**

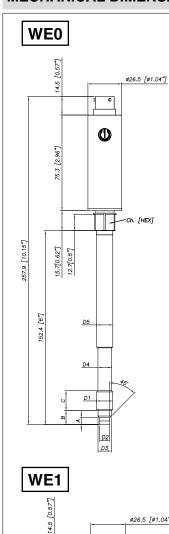

ø26.5 [ø1.04"]

-ø7.5 [ø0.30"]

-Ch. [HEX]

0

75.3 [2.96"]

12.7[0.5"]


<u>D2</u>


152.4 [67]


750.7 [29.557]

97.8 -0.05 [ Ø0.31" -0.002 ] Ø10.5 -0.025 [ Ø0.41" -0.001 ] Ø10.67 [ Ø0.42" ]
[ Ø0.31" -0.002 ] Ø10.5 -0.025 [ Ø0.41" -0.001 ]
[ Ø0.41" -0.001 ] Ø10.67
[ 20.42 ]
ø12.7 [ ø0.5" ]
5.56 -0.26 [ 0.22" -0.01 ]
11.2 [ 0.44" ]
15.74 [ 0.62" ]
16 [ 5/8" ]

D1	M18x1.5
D2	ø10 -0.05 [ ø0.394" -0.002 ]
D3	Ø16 -0.08 [ Ø0.63" -0.003 ]
D4	Ø16 -0.4 [ Ø0.63" -0.016 ]
D5	ø18 [ ø0.71" ]
Α	6 -0.26 [ 0.24" -0.01 ]
В	14.8 -0.4 [ 0.58" -0.016 ]
С	19 [ 0.75" ]
Ch [Hex]	19 [ 3/4" ]

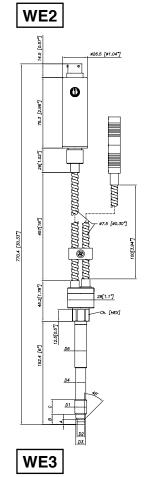

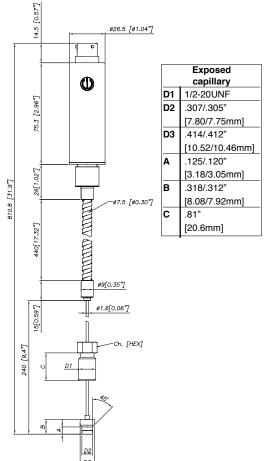




**WARNING**: For installation use a maximum tightening torque of 56 Nm(500 in-lb)

#### **ELECTRICAL CONNECTIONS**

#### **CURRENT OUTPUT (4...20mA, two wires)**

#### **EXTERNAL AUTOZERO**

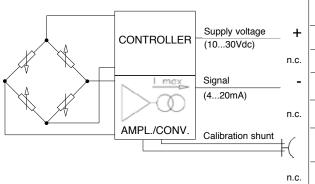

6-pin	8-pin	
Α	В	Supply voltage +
С	Α	n.c.
В	D	Signal _ (420mA)
D	С	n.c.
E-F	E-F	Autozero
	G - H	n.c.

**MAGNETIC** 

**AUTOZERO** 

	6-pin	8-pin
-	Α	В
	С	Α
-	В	D
	D	С
	E-F	E-F
		G - H

6 pin connector VPT07RA10-6PT2 (PT02A-10-6P)


Shield drain wire is tied to connector via cable clamp

8 pin connector


PC02E-12-8P Bendix

#### **LOAD DIAGRAM**

#### **AUTOZERO FUNCTION**

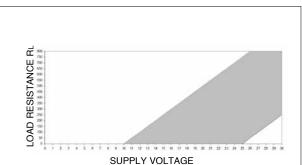

The diagram shows the optimum ratio between the load and supply voltage of the 4...20mA transmitter. For a correct use, choose any combination of load resistance and supply voltage, in the shaded area.



The Autozero function is activated through a magnetic contact (external magnet supplied with the sensor). See the manual for a complete Autozero function explanation.

#### **ACCESSORIES**

#### **Connectors**

6-pin mating connector (IP65 protection degree) **CON300** 8-pin mating connector **CON307** 

#### **Extension cables**

6-pin connector with 8m (25ft) cable C08WLS 6-pin connector with 15m (50ft) cable C15WLS 6-pin connector with 25m (75ft) cable C25WLS 6-pin connector with 30m (100ft) cable C30WLS

Cabl	e co	lor	code

Conn.	Wire	
Α	Red	
В	Black	
С	White	
D	Green	
Е	Blue	
F	Orange	

Other lengths

#### consult factory


#### **Accessories**

Mounting bracket **SF18** Dummy plug for 1/2-20UNF **SC12** Dummy plug for M18x1.5 **SC18** Drill kit for 1/2-20UNF KF12 Drill kit for M18x1.5 **KF18** Cleaning kit for 1/2-20UNF **CT12** Cleaning kit for M18x1.5 **CT18** Fixing pen clip **PKIT309** Autozero pen PKIT312

#### Thermocouple for WE2 model

Type "J" (153mm - 6" stem) **TTER 601** 

#### **ORDER CODE**

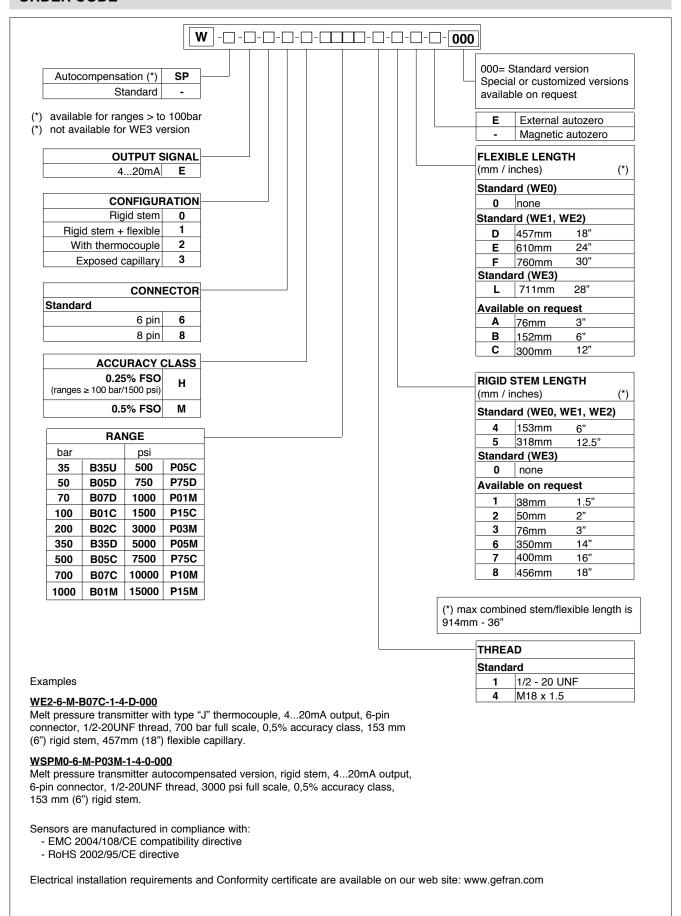

GEFRAN reserves the right to make any kind of design or functional modification at any moment without prior notice.



#### **GEFRAN** spa

via Sebina, 74 25050 PROVAGLIO D'ISEO (BS) - ITALIA tel. 0309888.1 - fax. 0309839063 Internet: http://www.gefran.com